

POWER SUPPLY

Product data sheet



SL-NTS24CV18W-CA


24V DC Power Supply with 18 Watt



PRODUCT FEATURES


- » 24 Volt DC power supply unit with 1.8 meter connection cable
- » Direct connection of up to 3 x 24V DC Led lights or Siro Receiver
- » 18 watts, maximum output power
- » Connection of wired sensors (TOUCH, PIR, DOOR, DOUBLE DOOR, HIDDEN TOUCH) to control the power supply output
- » **Wired sensors must not be used together with connected SIRO receivers (at the power supply unit output)!**
- » Short-circuit protection & overload protection
- » Low stand-by consumption < 0.179 watts

TECHNICAL DRAWING

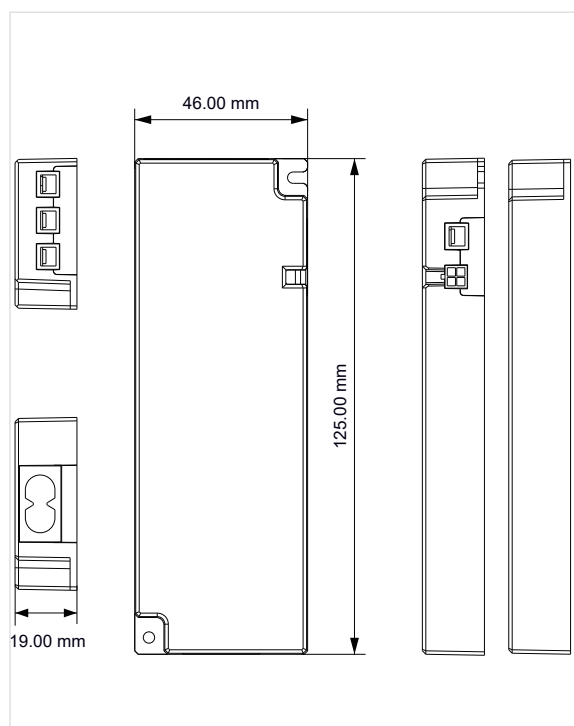

TECHNICAL DATA

- » Input voltage: 200 - 240V AC
- » Output voltage: 24V DC
- » Output current: 0.75 A
- » Power: 18 Watt
(10% reserve recommended)
- » Efficiency: 84,9 %
- » Standby P: 0.179 W
- » Idle power P_{no}: N/A
- » Networked standby power P_{net}: N/A
- » Protection class: IP 20
- » Mains frequency input: 50 - 60 Hz
- » Housing color: white
- » Ambient temperature: -20° - +45°C
- » Protection: Short-circuit &
..... Overload protection
- » Length: 125.00 mm
- » Width: 46.00 mm
- » Height: 19.00 mm
- » Weight: 145 g

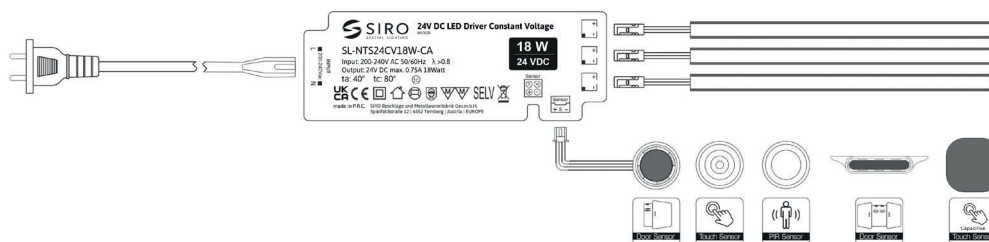

RoHS

Darf nicht in den Hausmüll entsorgt werden.
Must not be disposed of in household waste.

SIRO Beschläge- und
Metallwarenfabrik Ges.m.b.H.
Spielfeldstraße 12
4452 Ternberg, Austria

Tel . +43 (0)7256.6020.0
Fax . +43 (0)7256.8932
E-Mail office@siro.at
Web . www.siro.at

© 2023 Alle Rechte vor-
behalten.
All rights reserved
Version 07/25